



VERSION	MODIFY	DATE


PIN	Assignment
1	X1
2	Y1
3	X2
4	Y2



- Notes:
- Type: Film to Glass
 - Operating Voltage: $\leq 10V$
 - Operation Temperature: $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$
Storage Temperature: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
 - Life Time: $> 1,000,000$ times
 - Connect Material: FPC
 - Response Time: $\leq 10\text{ms}$
 - Linearity: $\leq 1.5\%$
 - Transmittance: $\geq 80\%$
 - Surface Hardness: $\geq 3H$ (pencil)
 - Operation force: $20g \sim 80g$
 - Resistance: X: $500\Omega - 1000\Omega$
Y: $200\Omega - 350\Omega$

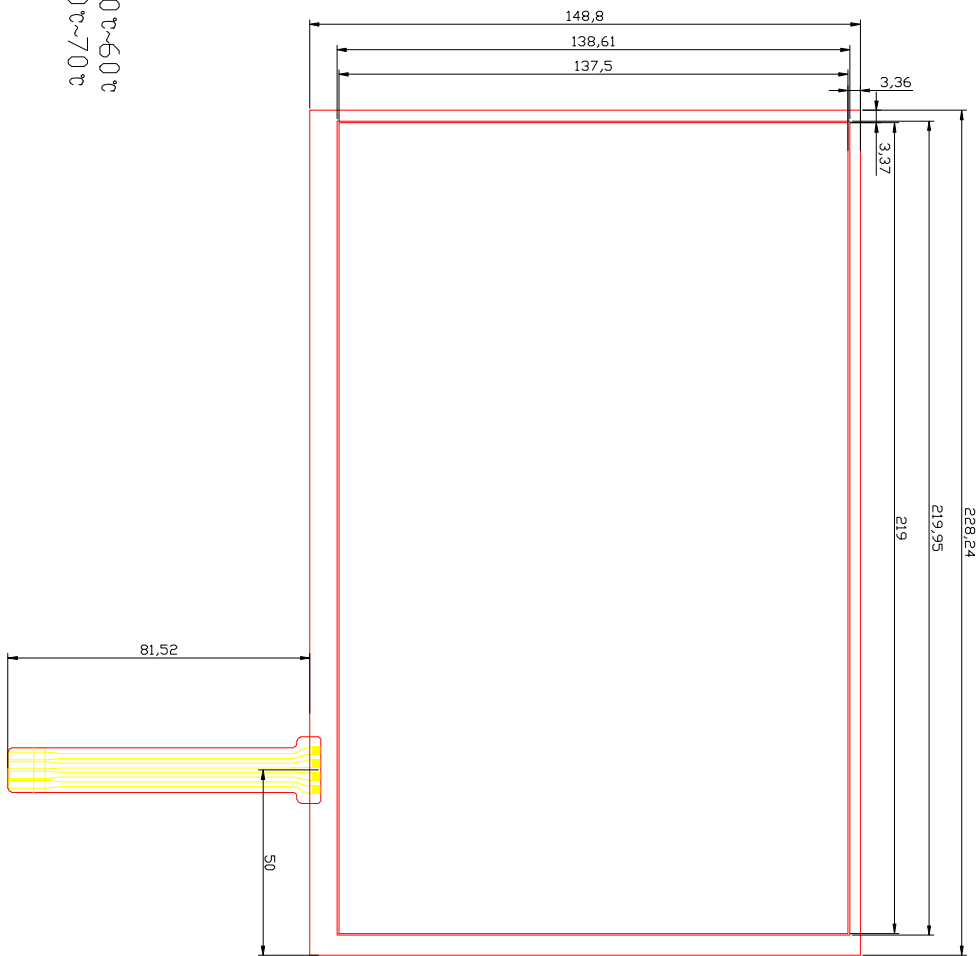

14.22
 TOP ITO Film 0.188mm
 Back ITO Glass 1.1mm
 0.3
 7 公差
 5 公差



良辰光电有限公司 Lctouch Electronics Co.LTD	MODEL NO. TP-10136-01	DRAWN:	DATE:	VERSION: 1.0	UNIT: MM	TOLERANCE: ± 0.2	SCALE: 1:1	REV:
--	--------------------------	--------	-------	-----------------	-------------	-------------------------	---------------	------