




VERSION	MODIFY	DATE

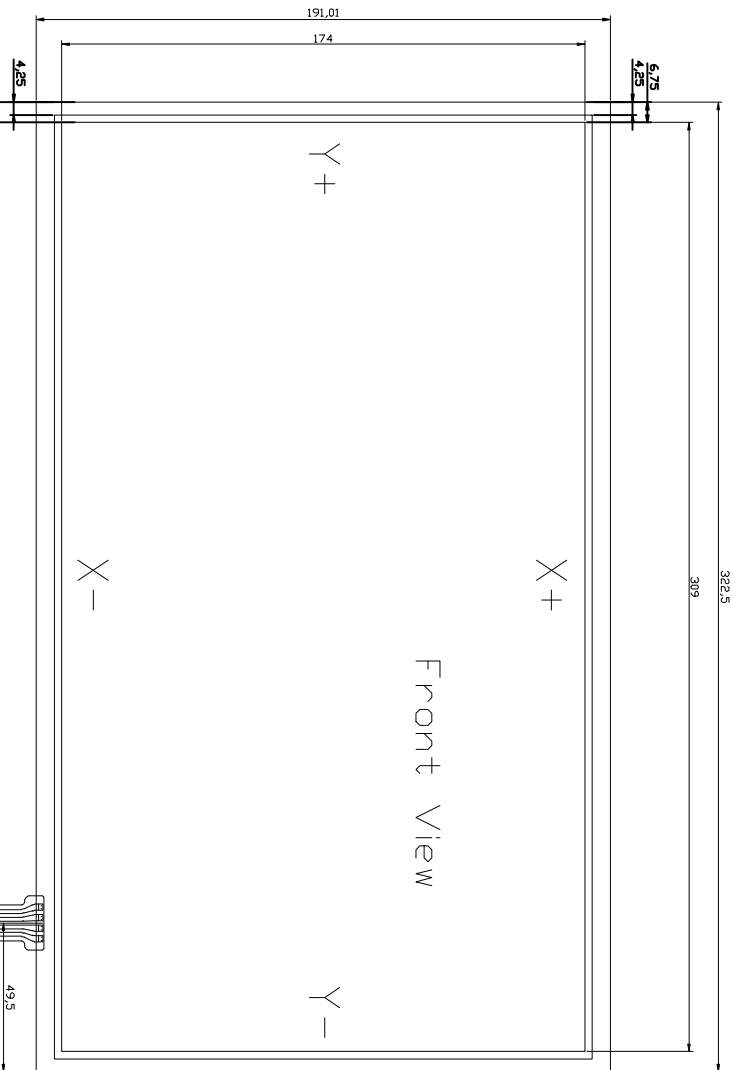

PIN	Assignment
1	Y+
2	X-
3	Y-
4	X+



- Notes:
- 1.Type:Film to Glass
 - 2.Operating Voltage:≤10V
 - 3.Operaton Temperature:-10℃~60℃
Storage Temperature:-20℃~70℃
 - 4.Life Time:>1,000,000 times
 - 5.Connect Material:IFPC
 - 6.Response Time:≤10ms
 - 7.Linearity:≤1.5%
 - 8.Transmittance:≥80%
 - 9.Surface Hardness:≥3H(pencil)
 - 10.Operaton force:20g~80g
 - 11.Resistance: **X**: 180Ω - 400Ω
Y: 500Ω - 900Ω



TOP ITO Film 0.188mm
Back ITO Film 0.188mm

良辰光电有限公司 Lctouch Electronics Co.,LTD	MODEL NO.	DRAWN:	DATE:	VERSION:	UNIT:	TOLERANCE:	SCALE:	REV:
	TP-14106-01			1.0	MM	±0.2	1:1	