



VERSION	MODIFY	DATE



由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

PIN	OUT
1	A
2	B
3	E
4	C
5	D

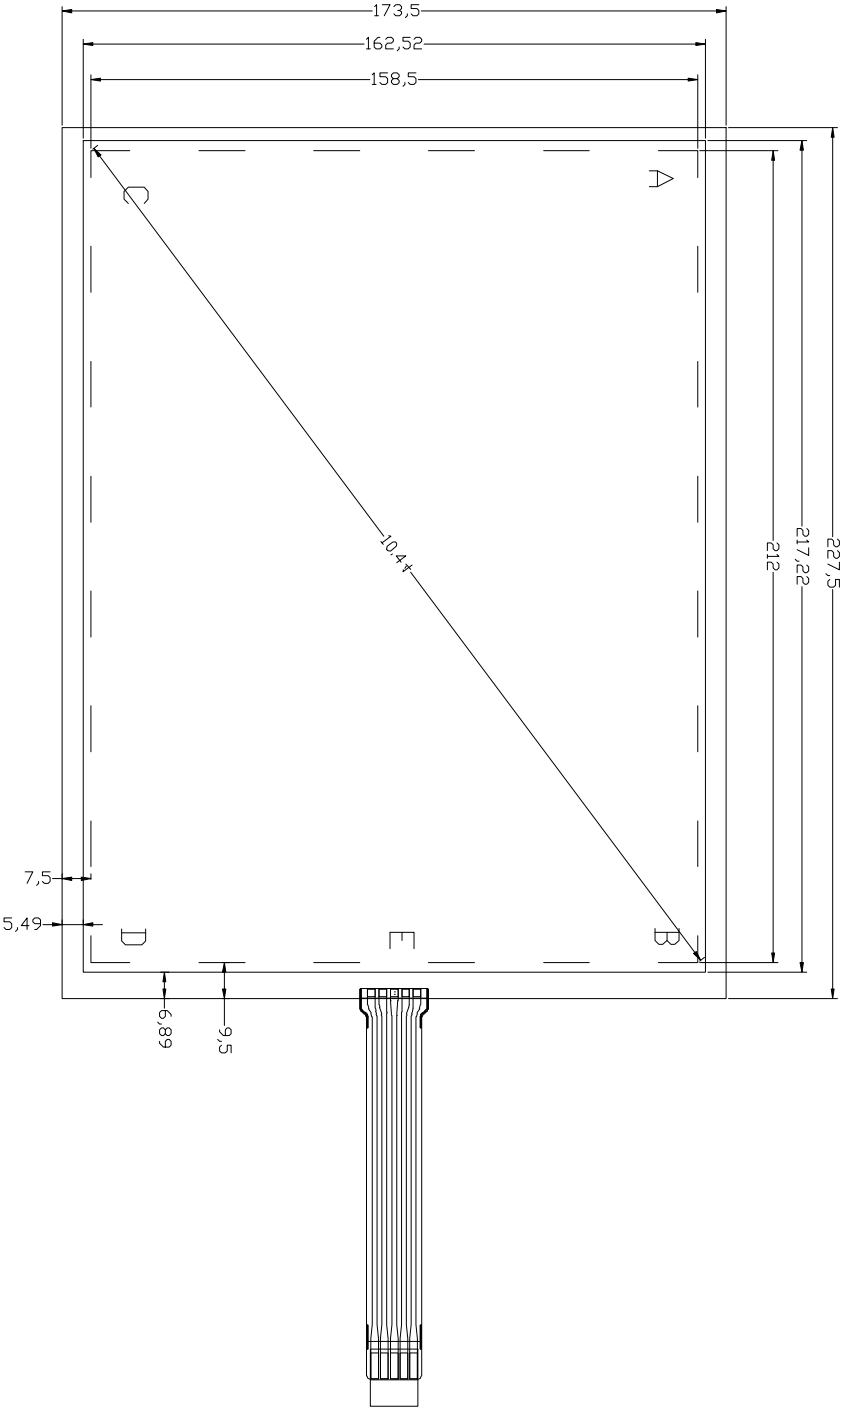

- Notes:
1. Type: Film to Glass
 2. Operation Temperature: $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$
Storage Temperature: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
 3. Hitting Life: $>35,000,000$ times
Writing Life: $>5,000,000$ times
 4. Linearity: $\leq 3.0\%$
 5. Transmittance: $\geq 80\%$
 6. Tail Tye: FPC By Gold Plated
 7. All Tolerance Without Marked: ± 0.3

ITD GLASS 1.8mm
ITD FILM 0.188mm

深圳市良展光电有限公司

MODEL NO.	DRAWN:	DATE:	VERSION:	UNIT:	TOLERANCE:	SCALE:	REV:
TP-SM10402			1.0	MM	± 0.2	1:1	

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作