
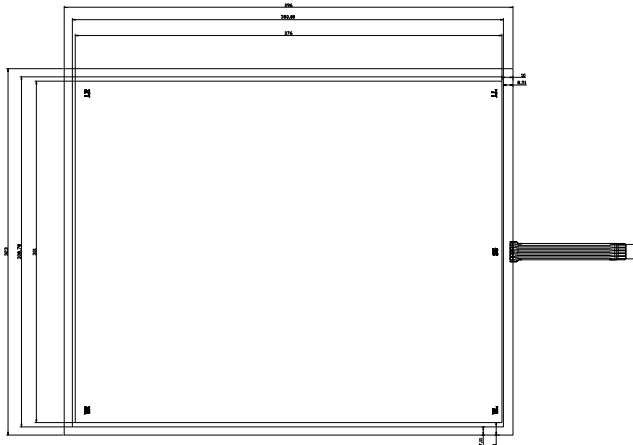


VERSION MODIFY DATE

PIN	OUT
1	UR
2	UL
3	SG
4	LL
5	LR



- Notes:
1. Type: Film to Glass
 2. Operation Temperature: $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$
 3. Storage Temperature: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
 4. Hitting Life: $> 35,000,000$ times
 5. Writing Life: $> 5,000,000$ times
 6. Linearity: $\leq 3.0\%$
 7. Transmittance: $\geq 80\%$
 8. Tail Tie: FPC By Gold Plated
 9. All Tolerance Without Marked: ± 0.3

ITO GLASS 1.8mm

ITO FILM 0.188mm

深圳市良展光电有限公司

MODEL NO.

DRAWN:

DATE:

VERSION:

UNIT:

TOLERANCE:

SCALE:

REV:

TP-5T19001-01

1.0

MM

± 0.2

1:1

白 Autodesk 教育版产品制作

白 Autodesk 教育版产品制作